



For indoor use only SPECIFICATION

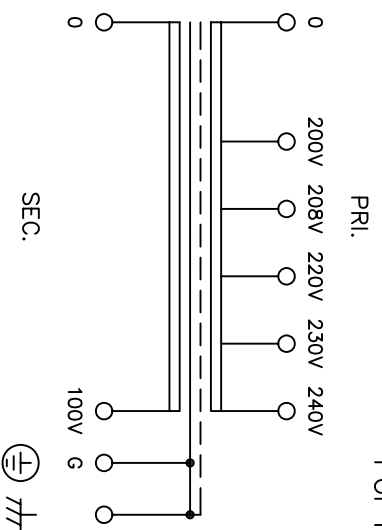

STANDARD	EN61558-2-4	UL 506	
MODEL	FUL21-50		
PHASE	(Φ)	1	
FREQUENCY	(Hz)	50/60	
CAPACITY	(VA)	50	
PRI. VOLTAGE	(V)	200 208 220 230 240	
SEC. VOLTAGE	(V)	100	
SEC. CURRENT	(A)	0.5	
PERCENT IMPEDANCE	(%)	3.3/3.3	
DIELECTRIC STRENGTH (V/min)	P-S,G	4200	2500
	S-G	2800	2500
INSULATION RESISTANCE		more than 100 MΩ	at DC 500V Megger
RATING		CONTINUOUS	
CLASS		F (SYSTEM 14)	
MASS	(kg)	3.7	
MAX. AMBIENT TEMP.	(°C)	40	
MAX. TEMP. RISE	(K)	100	100
PRI. CIRCUIT BREAKER	1A (EN60947-2)		
SEC. CIRCUIT BREAKER	0.5A (EN60947-2)		
PROTECTION DEGREE		IP00	
IEC MARK		Ⓞ	
TUV & CE MARK			
UL MARK			
UL FILE No.		E252316	

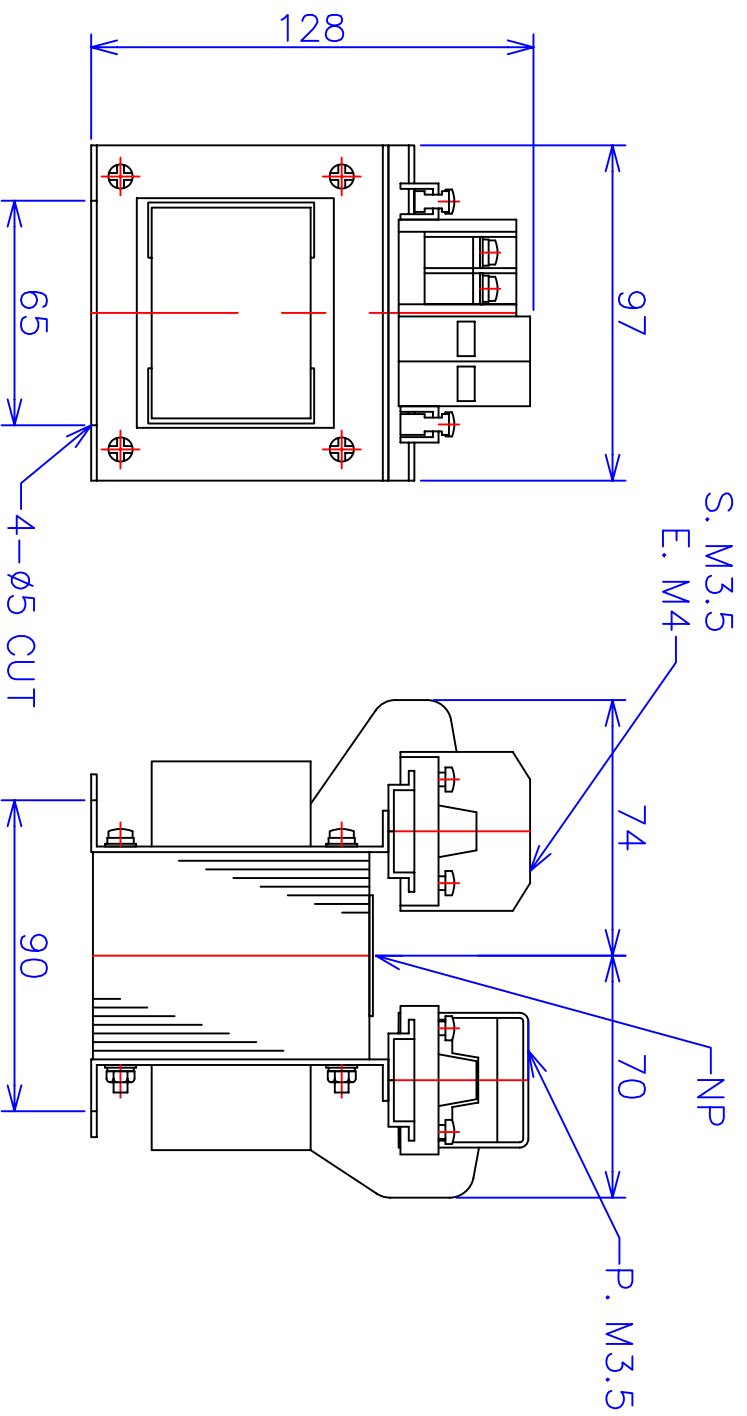

REVISIONS			
MARK	DESCRIPTIONS	DATE	
1	Geographical plot of a rated nameplate	2008/03/13	
NAME DATE SCALE			
DRAWN BY	K. Tamura	2006/12/20	
CHECKED BY	K. Tamura	2006/12/20	
FUKUDA ELECTRIC WORKS CO., LTD.		DRAWING No.	T-42767-50-M

TITLE TRANSFORMER